


PH – BETA 10-1000 Fire Fighting Pump

This new fire-fighting pump PH-BETA is the ideal choice for both professional and volunteer firefighters looking for reliable and effective equipment for their operations.



Specifications:	
Max Flow rate	1432 l/min
Flow at 6 bar	1291 l/min at 3 m suction height
Flow at 10 bar	1020 l/min at 3 m suction height
Delivery Head	150 m
Max. suction depth	8 m
Inlet connection	Storz A-110 / BSP 4" male threaded
Discharge connection	2x Storz B-75 / BSP 2 1/2" male threaded
Engine:	Briggs & Stratton 40HP (30,2 kW)
Integrated fuel tank capacity	17 l
Fuel	unleaded petrol (BA 95)
Fuel consumption	14 litres/hour
Acoustic performance (6 bar)	101,4 dB
Pressure limit	15,5 bar
Device dimensions (L x W x H)	782 x 615 x 775 mm
Dry weight (empty)	132,7 kg
Weight (with full tank)	144,5 kg
Cat. No.	vv 520

- Automatic vacuum pump: advanced technology allows for both automatic and manual control for maximum flexibility. The pump can draw water from a depth of 8m in less than 30 seconds.
- Large Built-in Tank: Provides continuous operation at full capacity for approximately 72 minutes, making it ideal for prolonged interventions.
- Compact Design and Low Weight: Designed for easy handling and transportation, allowing for quick and efficient deployment in various situations.
- Telescope LED Light: Ensures optimal lighting during night operations or in poorly lit conditions.

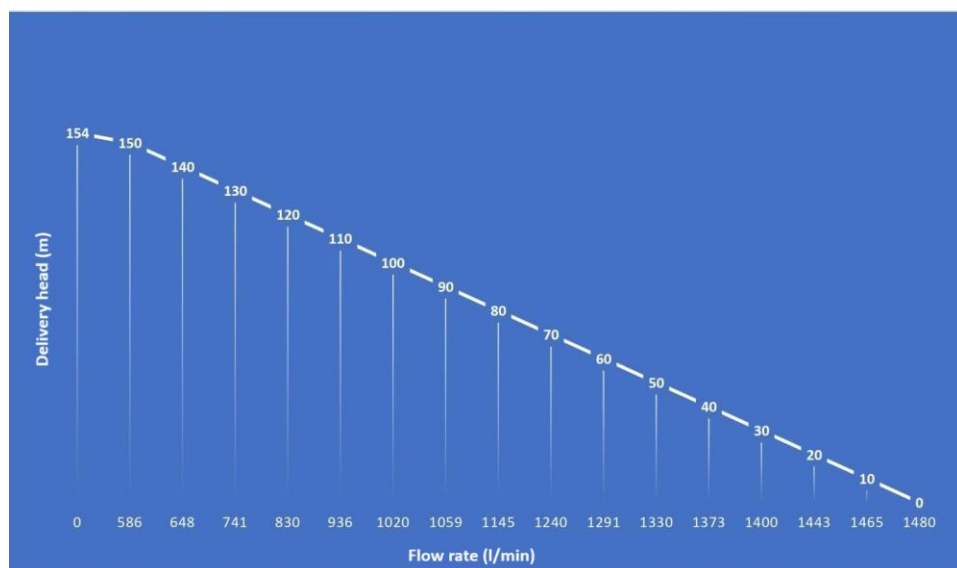

- Wide range of uses: ideal for all types of firefighting units and various operational conditions.
- Reliability and Safety: developed with a focus on the highest safety standards and user-friendliness.
- Certified by the European accredited testing laboratory TÚPO for quality assurance.
- Ease of Maintenance: designed to meet the highest safety standards and ensure simple maintenance.